


THROUGH THE WALL CONNECTION

This wall adapter is designed for use with the following models:
WA-1351DE, WA-1420H1, WA-1420E1, WA-1240H1 and WA-1240AE1.

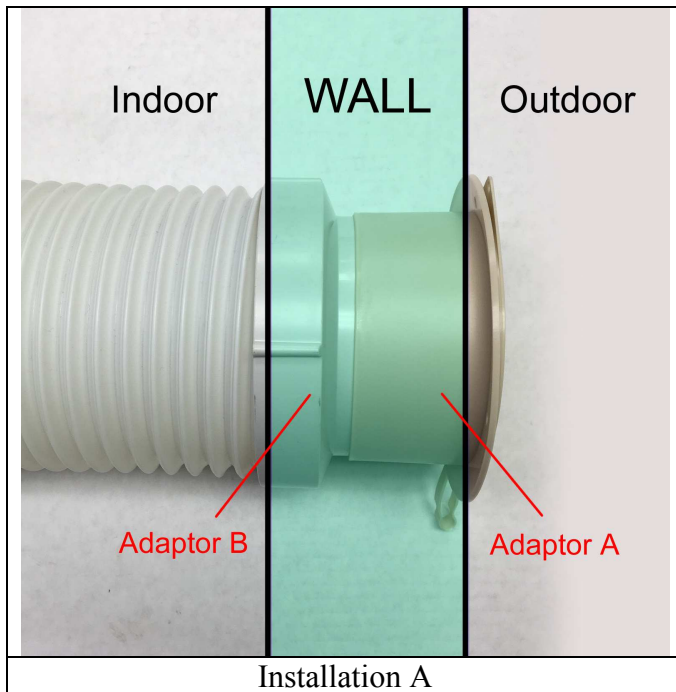

Installation Procedure:

1. Prepare holes on both sides of the wall. The size of the hole outdoor is to be the diameter of Adaptor A. The size of the hole indoor is to be the diameter of Adaptor B.
2. Extend the tip of the exhaust hose by couple inches and twist onto Adaptor B.
3. From the inside, insert hose and Adaptor B through the wall opening and expose the tip of Adapter B outside.
4. Secure Adaptor A onto Adapter B.
5. Push hose back so the lip of Adapter A is flush to the exterior wall, secure Adaptor A with 4 expansion plugs and screws (not included).

Note: Cover the hole using the cap when not in use.